


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED

版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2025-Jan-06

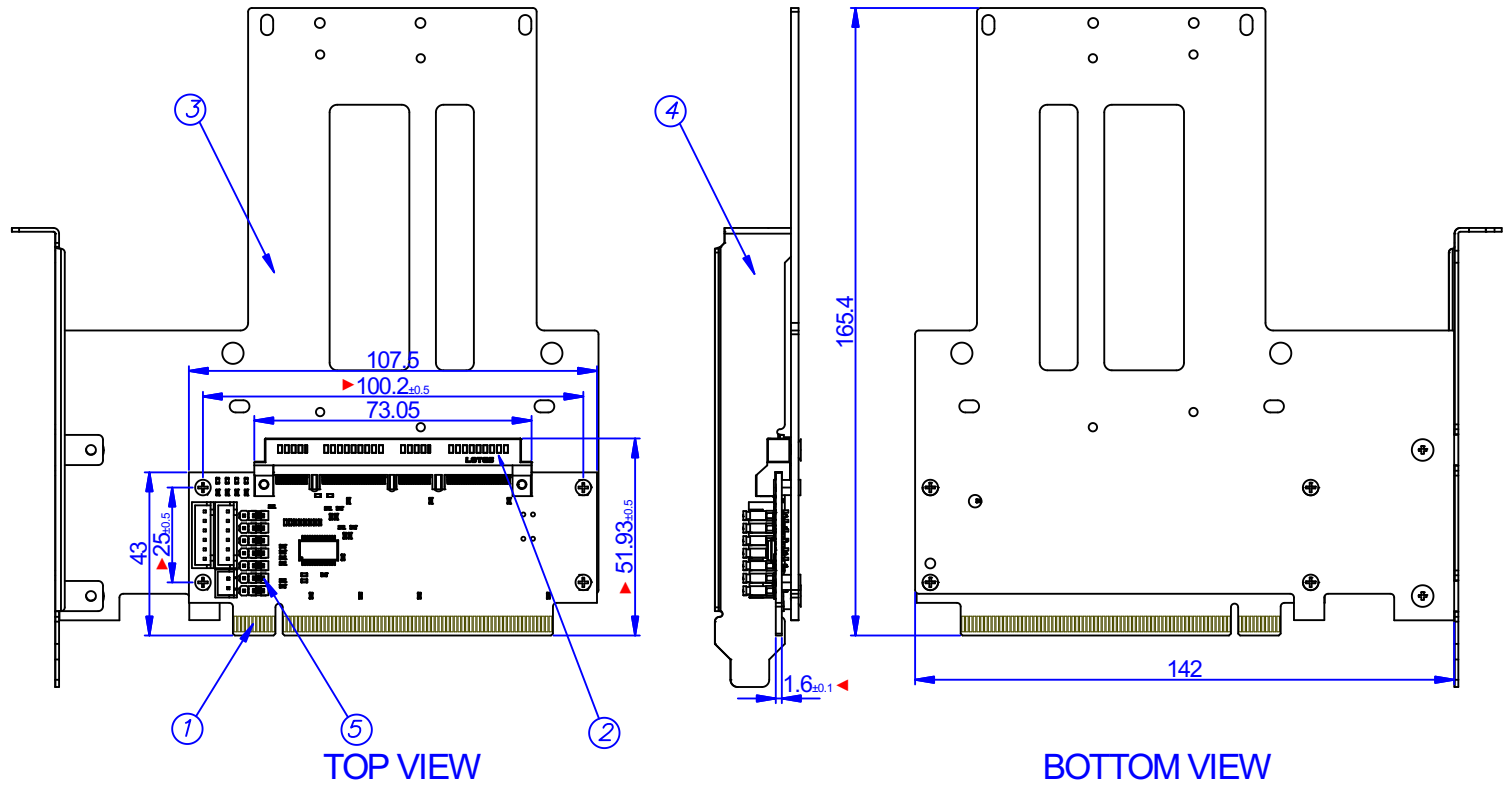


FEATURES:
PCIe X16 to 4C+ SFF-TA-1002
Adapter
Specification: PCIe 5.0x16

PHYSICAL PROPERTIES:
Operation Temp.Range: -40°C to 80°C
Flammability rating: 94V-0

NOTE
1.100% OPEN/SHORT TEST.
2.DIMSION MARK "▼" BY QC CHECK.

No.	PART NO.	DESCRIPTION	Q'TY
5	Cap	2 PIN JUMPER CAP	7Pcs
4	Shield	Solid, Full-height, Black Baffle	1Pcs
3	Base	FR4, 2mm PCB BASE	1Pcs
2	Connector	Gen-Z 4C+ Straddle Mount_1.57mm	1Pcs
1	Edge PCB	PCIe X16 CARD EDGE PCB , Black,ON GOLD FINGER, UL 94V-0	1Pcs

ADT-LINK							
TITLE: PCIe X16 to 4C+ SFF-TA-1002 Adapter				DWG NO.: ADT-R37C-001			
				CUSTOMER NO. : R37C-xxxxcm			
				CUSTOMER P/N: R37C			
	SCALE	UNIT	CUS REV.	ADT REV.	DATE	SHEET	
	NONE	mm	1.0	1.0	2025-Jan-06	1/1	
	DRAWING/制图		CHECKED/审核		APPROVED/核准		
Dane							