



PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ADT-LINK ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ADT-LINK IS PROHIBITED


版本 REV	变更内容 DESCRIPTION	变更号 ECN No.	日期 DATA
1.0	ISSUE	REL	2025-Jan-06

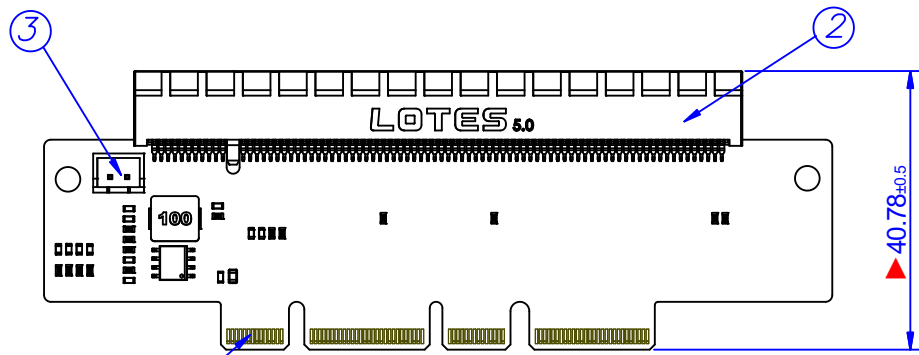

TOP VIEW



3D VIEW

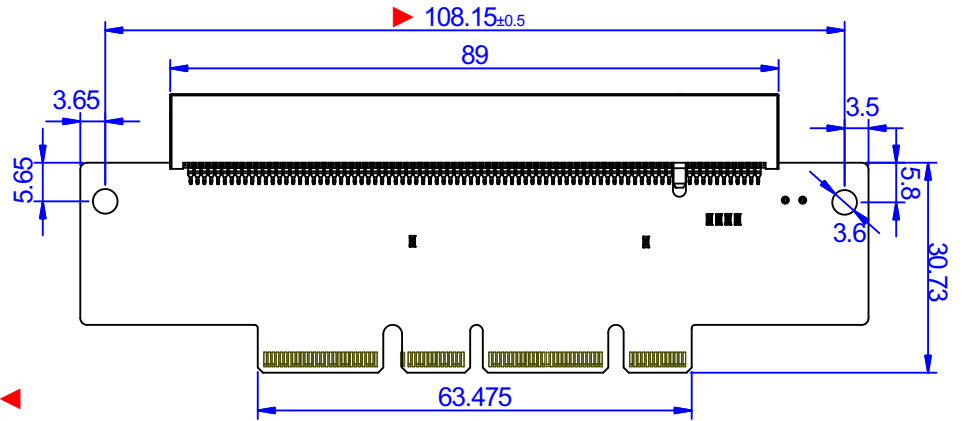

BOTTOM VIEW

FEATURES:
4C+ SFF-TA-1002 to PCIe X16
Adapter
Specification: PCIe 5.0x16

PHYSICAL PROPERTIES:
Operation Temp.Range: -40°C to 80°C
Flammability rating: 94V-0

NOTE
1.100% OPEN/SHORT TEST.
2.DIMSION MARK "▼" BY QC CHECK.



6			
5			
4			
3	Connector	2P 2.54mm Pitch Connector	1Pcs
2	Connector	PCIe X16 164PIN Straddle Mount, Black, RoHS / HF	1Pcs
1	Edge PCB	4C+ CARD EDGE PCB, Black,ON GOLD FINGER, UL 94V-0	1Pcs
No.	PART NO.	DESCRIPTION	Q'TY

ADT-LINK							
TITLE: 4C+ SFF-TA-1002 to PCIe X16 Adapter				DWG NO.: ADT-R73B-001			
				CUSTOMER NO. : R73B-xxxxcm			
				CUSTOMER P/N: R73B			
	SCALE	UNIT	CUS REV.	ADT REV.	DATE	SHEET	
	NONE	mm	1.0	1.0	2025-Jan-06	1/1	
DRAWING/制图 Dane		CHECKED/审核			APPROVED/核准		